

Switch Accessories

Thermowells P/N 047-0014

ITT Neo-Dyn offers a line of standard thermowells for use on its direct mounted (100T/132T) or remote mounted (100TC/132TC) temperature switches. Available in 316 stainless steel with 3/4 or 1 inch process connections and insertion lengths up to 12 inches.



Specifications

DASH No.	FIGURE	MATERIAL	P	Q	HEX SIZE	U	A
-02	A	316 CRES	3/4	3/4	1-1/8	2-1/2	4
-05	A	316 CRES	1	7/8	1-3/8	2-1/2	4
-04	A	316 CRES	3/4	3/4	1-1/8	4-1/2	6
-25	A	316 CRES	1	7/8	1-3/8	4-1/2	6
-28	B	316 CRES	3/4	3/4	1-1/8	3-1/2	5
-29	B	316 CRES	1	3/4	1-3/8	3-1/2	5
-07	B	316 CRES	3/4	3/4	1-1/8	4-1/2	6
-26	B	316 CRES	1	3/4	1-1/8	4-1/2	6
-09	B	316 CRES	3/4	3/4	1-1/8	7-1/2	9
-10	B	316 CRES	3/4	3/4	1-1/8	10-1/2	12
-27	B	316 CRES	3/4	3/4	1-1/8	12	13-1/2

Envelope Dimensions

FIG. A— For use on 100T/132T Direct Mount


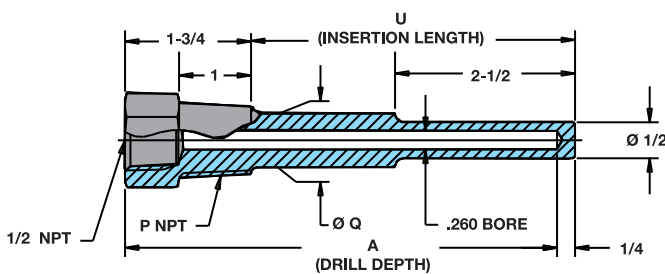


FIG. B— For use on 100TC/132TC Remote Mount

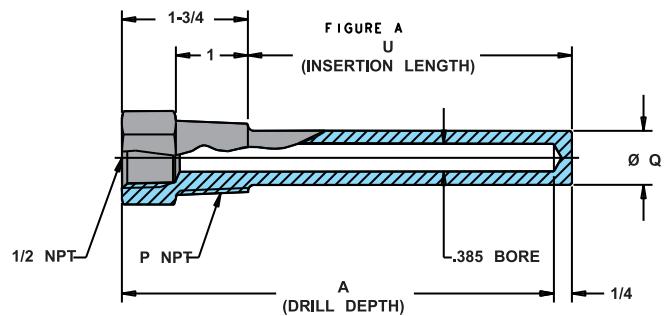

Ordering Procedure

- Select a figure from the above. Figure A has a .260 bore diameter for use on 100T/132T models while Figure B has a .385 bore diameter for use on 100TC/132TC models.
- Select a process connection size: 3/4 or 1 inch.
- Select an insertion length: U. Standard 100T/132T models use 2-1/2 inch "U" dimensions; standard 100TC/132TC models use 3-1/2 inch "U" dimensions.
- Insert selected dash number at end of part number.— See example.

Example

Part Number
Dash Number

047-0014 - **