

**Temperature Control Units**  
Water & Oil  
30° - 500°F

- **Portable Chillers**  
Air & Water-Cooled  
20° - 70°F
- **Central Chillers**  
Air & Water-Cooled  
Packages & Modules  
20° - 70°F
- **Pump Tank Stations**  
Chilled or Tower Water  
200 - 3600 gallons
- **Cooling Tower Cells**  
45 - 540 tons
- **Filters**
- **Heat Exchangers**
- **Heat Recovery Units**

**WARRANTIES**

- **Models with LE & HE Control Instruments:**  
**2 Years** covering the entire machine.  
**4 Years** covering the AVT™ valve, control instrument and heater.  
**Lifetime** covering the pump seal.
- **Models with VE Control Instrument:**  
**2 Years** covering the entire machine.  
**4 Years** covering the control instrument.  
**Lifetime** covering the pump seal.
- **Models with 300° Control Instrument:**  
**2 Years** covering the entire machine.  
**4 Years** covering the control instrument.  
**2 Year** covering the pump seal.

## SENTRA® SERIES



Sentra® Series temperature control unit, model SK-1035-HE shown with 10 kW heater and 3/4 HP pump.


### WATER UNITS

The Sentra® water temperature control unit is used to preheat a process to the desired operating temperature by engaging the unit's electric immersion heater and recirculating the water in the system.

Upon reaching the operating temperature, the Sentra® water temperature control unit can continue to add heat or become a cooling device by exchanging a small amount of recirculated water with cooling water from an external source.

Tight temperature control is achieved by adding just the right amount of heat or by precisely metering cooling water into the system.

**CHOOSE THE CONTROL INSTRUMENT THAT FITS YOUR NEEDS**

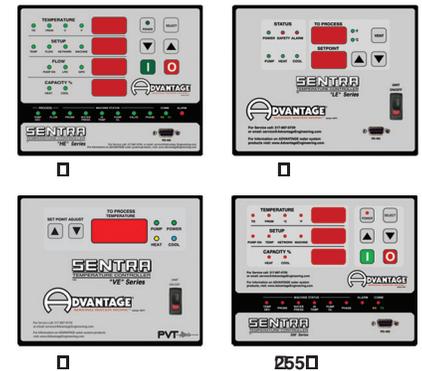

• **30°F to 300°F Process Temperatures\***

• **10 to 34 kW Heaters**


• **1/2 to 7.5 HP Centrifugal Pumps (20 - 100 GPM)**

• **1/2" & 3/4" AVT™ Modulating Cooling Valves (LE & HE models)**

• **3/8" - 1" Solenoid Cooling Valves (VE & 300°F models)**

\* The Sentra relies on an external source of cooling water that must be colder than the desired set point temperature.

**APPLICATIONS**

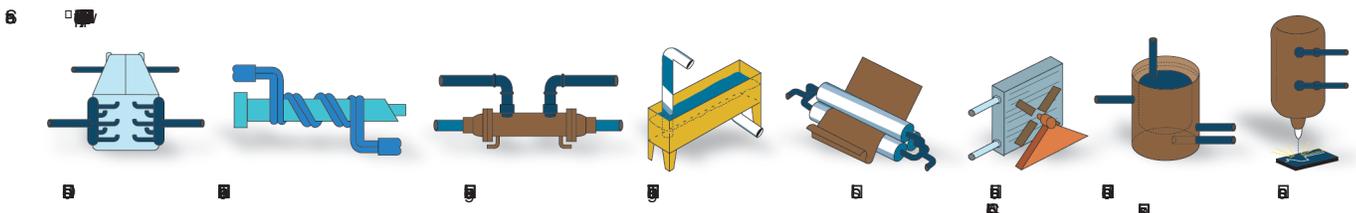


# SPECIFICATIONS

		SK- 620	6 5	6 5	665	675	6 0	1020	10 5	10 5	1065	1075	10 0	10 0	10100	1620	16 5	16 5	1665	
Heater <sup>1</sup>	kW	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16	16	16	
Process Pump	HP	1/2	3/4	1	1 1/2	2	3	1/2	3/4	1	1 1/2	2	3	5	7 1/2	1/2	3/4	1	1 1/2	
	GPM	20	35	45	62	75	80	20	35	45	62	75	80	90	100	20	35	45	62	
	PSI	30	30	30	30	30	30	30	30	30	30	30	30	30	34	54	30	30	30	30
Full Load Amperage	230 volt	17.0	17.8	18.6	20.2	21.8	24.6	27.0	27.8	28.6	30.2	31.8	34.6	40.3	47.1	42.0	42.8	43.6	45.2	
	@3ø/60hz <sup>2</sup>	460 volt	8.5	8.9	9.3	10.1	10.9	12.3	13.5	13.9	14.3	15.1	15.9	17.3	20.2	23.5	21.0	21.4	21.8	22.6
Dimensions (inches)	Height	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	28 1/4	44	44	28 1/4	28 1/4	28 1/4	28 1/4
	Width	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	12 1/2	16	16	12 1/2	12 1/2	12 1/2	12 1/2
	Depth	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	19 1/2	24	24	19 1/2	19 1/2	19 1/2	19 1/2
Connections (inches)	T/F <sup>3</sup>	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	2	2	1 1/4	1 1/4	1 1/4	1 1/4
	S/D <sup>4</sup>	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Weight (pounds)	Shipping <sup>5</sup>	195	200	205	205	210	220	198	200	208	208	213	223	275	290	200	205	210	210	

		SK- 1675	16 0	16 0	16100	2 5	2 5	2 65	2 75	2 0	2 0	2 100	5	5	65	75	0	0	100
Heater <sup>1</sup>	kW	16	16	16	16	24	24	24	24	24	24	24	34	34	34	34	34	34	34
Process Pump	HP	2	3	5	7 1/2	3/4	1	1 1/2	2	3	5	7 1/2	3/4	1	1 1/2	2	3	5	7 1/2
	GPM	75	80	90	100	35	45	65	75	80	90	100	35	45	65	75	80	90	100
	PSI	30	30	34	54	30	30	30	30	30	34	54	30	30	30	30	30	34	54
Full Load Amperage	230 volt	46.8	49.6	55.4	62.2	63.1	63.9	65.5	67.1	69.9	75.5	82.3	88.2	89.0	90.6	92.2	95.0	100.6	107.4
	@3ø/60hz <sup>2</sup>	460 volt	23.4	24.8	27.7	31.1	31.6	32.0	32.8	33.6	35.0	37.8	41.2	44.1	44.5	45.3	46.1	47.5	50.3
Dimensions (inches)	Height	28 1/4	28 1/4	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44	44
	Width	12 1/2	12 1/2	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16
	Depth	19 1/2	19 1/2	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24
Connections (inches)	T/F <sup>3</sup>	1 1/4	1 1/4	2	2	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	2	2	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	2	2
	S/D <sup>4</sup>	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Weight (pounds)	Shipping <sup>5</sup>	220	225	285	300	270	275	280	285	290	295	310	280	285	290	295	300	305	320

Notes: 1. Derate heater output by 25% for 208/3/60 operation. 2. Consult factory for 50hz operations. 3. T - to process; F - from process. 4. S - water supply; D - drain. 5. Approximate unit shipping weight.

## OTHER PRODUCTS

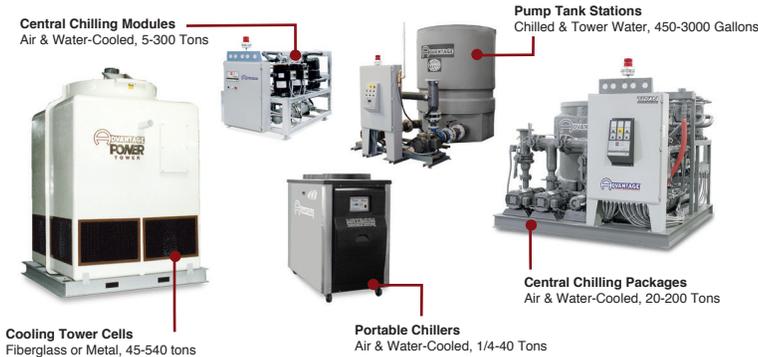

### Model Designator for Sentra® Series Temperature Control Units

**SK - 1035-HE**

Sentra® Series  
Heater kW  
Flow Rate GPM

Instrument  
• HE : HE Series  
• LE : LE Series  
• VE : VE Series  
• 300° : 300° Series



Phone: 770-345-0010 Web: www.southgateprocess.com

TEMPERATURE CONTROLLERS • PORTABLE CHILLERS • CENTRAL CHILLERS • PUMP TANK STATIONS • TOWER SYSTEMS • FILTERS

## SENTRA® SERIES

## Technical Data

The Sentra® water temperature control unit is used to preheat a process to the desired operating temperature by engaging the unit's electric immersion heater and recirculating the water in the system.

Upon reaching the operating temperature, the Sentra® water temperature control unit can continue to add heat or become a cooling device by exchanging a small amount of recirculated water with cooling water from an external source.

Tight temperature control is achieved by adding just the right amount of heat or by precisely metering cooling water into the system.

Package for standard units having 16 kW and smaller heaters and 3 horsepower and smaller pumps. Approximate dimensions: 29" H x 12.5" W x 19.5" D.

Package for standard units having 24 & 34 kW heaters and 5 & 7.5 horsepower pumps. Approximate dimensions: 44" H x 16" W x 24" D.



## THE SENTRA SYSTEM

**CONTROL INSTRUMENT...** Choice of microprocessor instrument offers precise temperature control, machine status and diagnostic information presented in an easy-to-understand interface (not visible from this angle).

**SENSOR PROBE...** Placed in the fluid stream for accurate temperature monitoring. The **To Process** sensor reads process temperature delivered to process. The **High Temperature Limit** protects against overheating. HE & 300° Instruments include a From Process sensor probe.

**ELECTRICAL CABINET...** Hinged door opens to allow full access to electrical components. Note: 5 kA RMS SSCR

**FLOW METER...** Included with HE instruments to monitor process flow. Flow is displayed in GPM (gallons per minute) or LPM (liters per minute). Knowing the process flow is critical for fine tuning heat transfer efficiency.

**MOTOR...** Horizontal orientation extends pump seal service life and assures that water and debris will not foul motor windings.

**STAINLESS STEEL CABINET...** Durable and sturdy construction, vented to dissipate excess process heat, and easy to clean. Rear cover panel is easy-to-remove for access to the mechanical components (panel removed in photo).

**COOLING CYLINDER**

**POWER CORD...**

10' factory installed 4 wire power cord (3 power & 1 ground). Ready for installation to customer supplied disconnect. Supplied on units up to 3hp and 16kW. (Not shown in picture).

**PRESSURE GAUGES...** Indicates 'to process' and 'from process' pressure. The operator can determine  $\Delta P$ , pump direction and other operating characteristics from these gauges.

**HEATER...** Flange mounted for easy service.

**TO PROCESS CONNECTION...** All unit connection ports are machined into reinforced bosses to provide strong and rigid connections.

**COOLING WATER DRAIN CONNECTION**

**COOLING VALVE...** Provides precise control and easy maintenance. AVT™ modulating valve on LE & HE models. Solenoid valve on VE and 300° units.

**FROM PROCESS CONNECTION**

**HEATING CYLINDER...** Cylinder castings are custom designed to eliminate leak-prone pipe fittings found on competitive models. The Heating and Cooling cylinders are flange mounted to the pump casing.

**COOLING WATER SUPPLY CONNECTION**



**PUMP CASING...** With built-in seal flush for extended pump seal service life.

**CASTERS...** Swivel casters allow easy mobility.

**GALVANIZED STEEL BASE...** Provides a rigid, strong, and long lasting support structure.

## CENTRIFUGAL PUMP


The custom designed casing and impeller generates 20% more flow with the same horsepower as compared to many competitive machines. Standard 3/4 hp pumps produce 35 gpm at 30 psi. Refer to the pump curves for more details. The pump casing has vertically facing machined ports that receive the heating and cooling cylinder assemblies. This eliminates dozens of flow restricting and leak prone pipe fittings found on some competitive machines. The motor is mounted horizontally to extend bearing and seal life. All Sentra® temperature control units have an open drip proof motor with a stainless steel shaft. A pump seal flush line diverts a portion of the water flow over the pump seal to wash away solids and debris that may damage the seal. The standard shaft seal is covered by a lifetime warranty on most standard models.

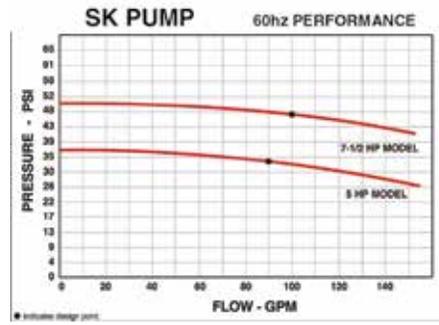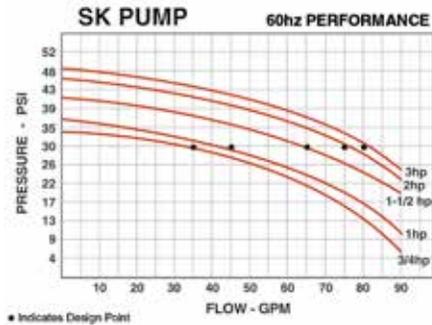


## COOLING VALVES



A standard feature of all units with the LE or HE controller is the **AVT™ (Advanced Valve Technology)**, the industry's first and only modulating cooling valve designed for temperature control units. The AVT™ cooling valve offers straight line temperature control by opening or closing in 2000 steps, from 0% to 100% to pass a precise flow to drain. This introduces cooling water from plant supplies with no water hammer pressure spikes or temperature swings. At start-up the AVT™ valve opens for about 30 seconds so that trapped air can be purged from the process piping. A 1/2" modulating cooling valve has the approximate cooling capacity of a 1" solenoid valve.

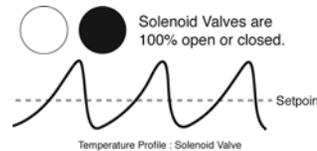

Straight line control is difficult to achieve with a solenoid valve because it is either fully open or closed. As it opens, it passes a slug of over-temperature water to drain and introduces an equal portion of cooling water. As it closes, it creates a pressure spike known as water hammer sending shock waves across the process and rapidly decreasing the useful life of pump seals, O-rings, and other system components. The over-cooling pulse creates wasteful heater operation and consumes electrical energy. The AVT™ modulating cooling valve eliminates this.

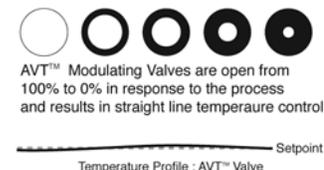

The AVT™ valve provides precise cooling with no water hammer.



A standard feature of all units with the VE or 300°F controller is the solenoid controlled cooling valve. Pulsed by the microprocessor controller, the solenoid cooling valve provides good temperature control and is best applied on applications with small cooling loads and when a large temperature difference exists between the set point and cooling water temperatures.

The Sentra® cannot achieve temperatures below the cooling water supply temperature and generally will provide slightly warmer water to process compared to the cooling water temperature even with the cooling valve fully open. Your Advantage sales representative can help you select the proper cooling valve for your application.

## ELECTRICAL PANEL

DIN rail mounted electrical components are selected for reliability and are UL approved. Color coded numbered wires are easy to identify for service purposes. A 10' power cord is included on standard models up to 3HP and 16kW. The transformer supplies power to the control circuit. The pump motor starter is a high grade contactor type and includes over current, phase loss and short circuit protection. A long life mechanical contactor is standard for the heater. NEMA 1 electrical construction is standard and suitable for the majority of applications. NEMA 12 electrical construction is available.



## COMPONENTS

Phone: 770-345-0010 Web: www.southgateprocess.com


**HEATER...** 6 kW to 34 kW are offered. The heater is made with a stainless steel sheath. The stainless steel sheath minimizes 'pitting' damage from dissolved chemicals in the process water. The stainless steel sheath also performs well during high temperature duty when compared to copper heating elements. The heater has a flange for bolt-in mounting and an O-ring seal to prevent leaking. The heater is easy to replace if needed.



**MECHANICAL CONTACTOR...** Engages the heater to add heat to the process circulation. Solid state contactors are optional and recommended for applications where frequent heater cycling is anticipated.



**PROBES...** Solid state temperature sensors are embedded in a threaded bulbwell. All probes are terminated with quick-disconnect plugs to ease service and maintenance.

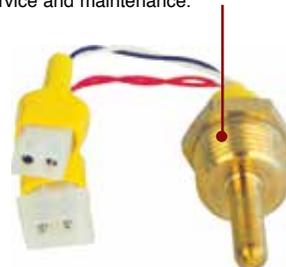


**WATER PRESSURE SWITCH...** Monitors water supply pressure. Minimum supply pressure of 20 PSI is required to maintain process temperatures over 100°F. For process temperatures over 250°F minimum water supply pressure of 55 PSI is critical.



## OPTIONAL CLOSED CIRCUIT SYSTEMS

The standard unit uses direct injection mixing of cooling water into the recirculated fluid for cooling. Optional closed circuit units use a heat exchanger to isolate the process recirculated fluid from the cooling fluid

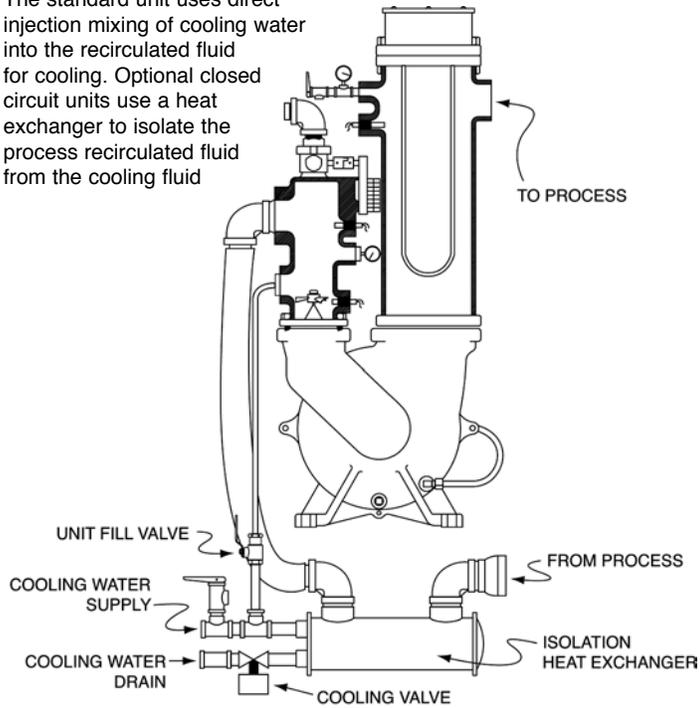

## OPTIONAL DUAL ZONE DOLLY



Processors often want to run different temperatures on each mold half to produce the best part quality. A dual zone dolly that holds two standard single zone units adds convenience by providing a common castered dolly with optional single cooling water supply and drain connection and optional electrical junction box where both units can be connected with a single power supply.



Shown in photos are two Advantage Sentra temperature control units with VE microprocessor control instruments on a dual zone dolly with optional single cooling water supply and drain connection and optional single power supply connection.

**HEATING & COOLING CYLINDERS...** Separate heating and cooling cylinders are required for precise blending of process and cooling water. Cylinders are cast iron from custom molds with reinforced bosses for process and ancillary

connections. The tanks are flange mounted to the pump casing.



**PRESSURE GAUGES...** 'To' and 'From' process pressure gauges are standard and are placed across the process to provide full process performance information. Pump generated pressure is determined by the difference between the two pressure readings. Plant water supply pressure is indicated when the unit is off and the plant's water supply pressure is on.




## OPTIONAL MOLD PURGE

The mold purge system removes process water from the process to the unit drain. The optional mold purge system is supplied as a factory installed option.



AIR AND WATER MOVEMENT DURING MOLD PURGE OPERATION

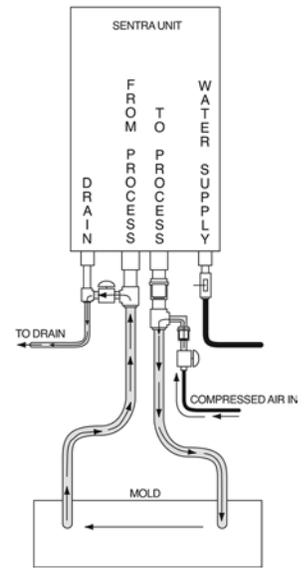

## OPTIONAL NON FERROUS COMPONENTS

Reduce ferrous metals in your system by selecting optional non-ferrous pump casing and suction and discharge tanks.



## OPTIONAL VISUAL ALARM BEACON



Pressure and temperature deviations can be signaled by the optional Alarm Beacon. Factory or field installed.


## OTHER OPTIONS

- 3/4" AVT™ modulating cooling valve (LE & HE models)
- 1/2" - 1" solenoid cooling valve (VE & 300°F models)
- Power disconnect switch

## CUSTOM UNIT DESIGNS

Advantage staffs an Engineering Department with experienced water system designers. Working from customer supplied facility and process information, our designers can customize a temperature control unit to your exact specifications, including higher flows and greater heater capacities.



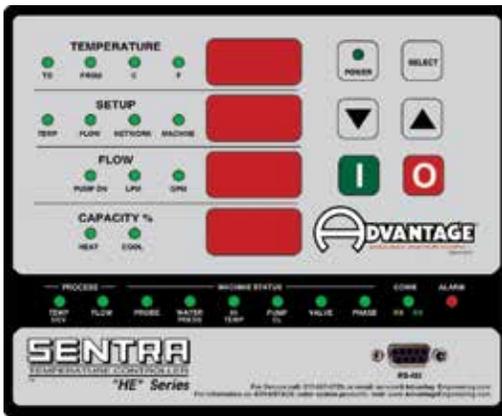

**FLOW METER SENSOR...** Made of high quality elastomer to operate under high temperature and a wide range of flows.



### HE Series Controller ... For Process Temperatures up to 250°F.

- Four large display windows with continuous display of *To Process* temperature, *Setup* parameters, unit *Flow* and unit *Capacity*.
- Process temperature display in Fahrenheit or Celsius
- Selectable *From Process* temperature display.
- Easy to program set up parameters for *Temperature*, *Flow*, *Network* and *Machine*.
- Built-in flow meter display unit flow in GPM or LPM.
- Capacity indication in real time “%” of capacity or actual .
- Green (ok) - Red (fault) status indicating lights for *Probe*, *Water Pressure*, *High Temp*, *Pump Overload*, *Cooling Valve* and *Phase (pump rotation)*.
- Out-of-spec alarms for temperature and flow.
- Built-in SPI communications. Modbus™ RTU & TCP/IP protocol are optional.
- A 20' communications cable is optional.
- A remoteable display panel with 20' - 200' cable is optional.
- The AVT™ modulating cooling valve is used with this instrument.




### VE Series Controller ... For Process Temperatures up to 250°F.

- Single large display window with continuous display of *To Process* temperature.
- Status indicating lights for *Power*, *Pump*, *Heat* and *Cool* .
- On - Off rocker switch.
- Pulsed solenoid cooling valve is used with this instrument.



### LE Series Controller ...For Process Temperatures up to 250°F.

- Two large display windows with continuous display of *To Process* and *Setpoint* temperatures.
- Process temperature display in Fahrenheit or Celsius.
- Momentary display of setup parameters in Setpoint display window.
- Status indicating lights for *Power*, *Safety*, *Alarm*, *Pump*, *Heat* and *Cool*.
- Built-in SPI communications.
- A 20' communications cable is optional.
- The AVT™ modulating cooling valve is used with this instrument.

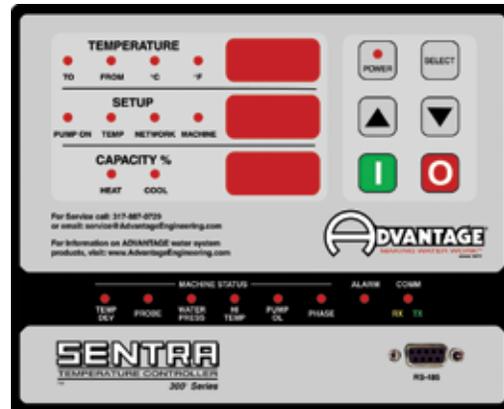

### 300°F Series Controller ... For Process Temperatures up to 300°F.

- Three large display windows with continuous display of *To Process* temperature, *Setup* parameters and unit *Capacity*.
- Process temperature display in Fahrenheit or Celsius.
- Easy to program setup parameters for *Pump On*, *Temperature*, *Network* and *Machine*.
- Green (ok) - Red (fault) status indicating lights for *Temperature Deviation*, *Probe*, *Water Pressure*, *High Temperature*, *Pump OL* and *Phase*.
- Visual alarm output provided on temperature deviation.
- Built-in SPI communications. Modbus™ and other interface methods are optional.
- A 20' communications cable is optional.
- Pulsed solenoid cooling valve is used with this instrument.

The unit requires an external source of water for system filling, pressurizing and cooling. The minimum water supply pressure is 55 psi to operate up to 300°F. A pulsed 3/8" solenoid cooling valve is used with this instrument.



Phone: 770-345-0010 Web: www.southgateprocess.com

TEMPERATURE CONTROLLERS • PORTABLE CHILLERS • CENTRAL CHILLERS • PUMP TANK STATIONS • TOWER SYSTEMS • FILTERS